



# PREMIER F

## Compact leak detector for production testing



- ✓ **NEW COMPACT FORMAT**  
(1/2 19")
- ✓ **OPTIMISED MEASUREMENT**
- ✓ **EASY SET-UP**
- ✓ **HIGH SPECIFICATIONS -  
COMPETITIVELY PRICED**

### 5 SERIES

*Without any doubt the smallest high-performance leak detector on the market.*

*Specially adapted for automatic or semi-automatic test machines, the F520 has a full range of specifications at a very competitive price.*



#### Main Features

- Differential pressure decay leak measurement
- 2 ranges of leak measurement ( $\Delta P$ )  
Full scale: 50 Pa or 500 Pa
- Test modes:
  - $\Delta P$
  - $\Delta P / \Delta t$
  - Flow units
  - Blockage test
  - and others, depending on your applications
- New, faster system to fill parts
- Manual calibration on front panel with calibrated leak
- 16 programs
- **Serial links:**  
**RS232:** printer, bar code reader, P.C. and parameter storage module  
**RS232:** intelligent remote control  
**RS485:** ATEQ network  
**Infrared:** switch, LFC, P.C...
- 7 inputs / 5 outputs
- Time and date display, choice of languages and units, customisation of tests for your requirements, automatic measurement cycle...



#### Applications



**Automotive:** shock absorbers, gearboxes, tank caps, carburettors, non return valves, cylinder heads, filters, radiators, seals, cylinders, engine oil and water circuits...

**Domestic appliances:** bottles, percolators, cookers, steam irons, ovens, washing machines...


**Medical:** catheters, dialysis equipment, micropipettes, plastic taps, drain bags, syringes, valves...

**Packaging:** aerosol cans and valves, trigger pumps, ink cartridges, cosmetic bottles, food sachets...

#### Options

- Electronic regulator
- Dual pressure
- High speed valve
- 2 pneumatic outputs for control of sealing connectors
- 6 x 24 V programmable outputs for external connection
- 2 analogue outputs:  
0 - 10 V or 4 - 20 mA
- Automatic calibration check
- Temperature compensation

## Principle of Measurement

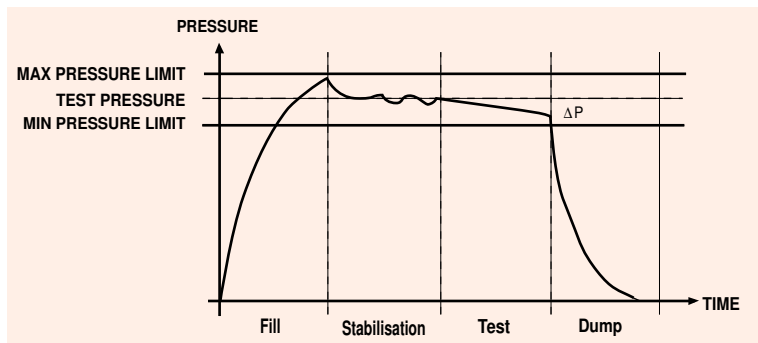

## Measurement Ranges

ΔP MEASUREMENT		
RANGE	ACCURACY	MAXIMUM RESOLUTION
0 - 50 Pa	± 1% of full scale	0.01 Pa
0 - 500 Pa	± 1% of full scale	0.1 Pa


PRESSURE MEASUREMENT		
RANGE	ACCURACY	MAXIMUM RESOLUTION
All ranges	± 1% of full scale	0.1% of full scale

### MECHANICAL PRESSURE REGULATION

Vacuum / 5 - 50 kPa / 20 - 400 kPa / 50 - 900 kPa

### ELECTRONIC PRESSURE REGULATION

Vacuum / 1 - 10 kPa / 5 - 50 kPa / 20 - 200 kPa / 50 - 500 kPa / 100 - 1 000 kPa / 100 - 1 600 kPa / 100 - 2 000 kPa

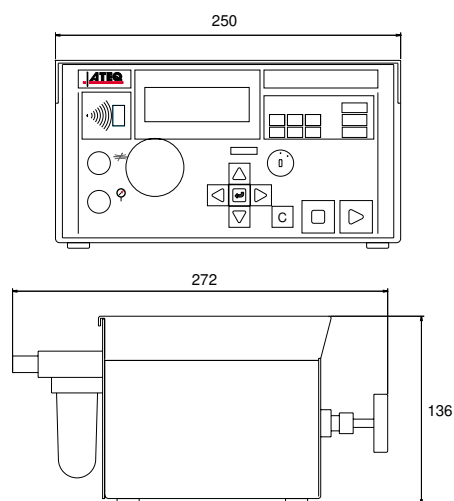

## Technical Specifications

### Physical

Weight: approximately 4 kg

### Interface

Navigation keys  
4-line LCD display  
Results indicator lights

### External electrical supply

Voltage: 24 V DC / 1.6 A  
Mains adapter included (110 - 240 V AC)

### Air supply

Clean and dry air required  
Air quality standard to be applied (ISO 8573-1)

### Temperature

Operating : + 10°C to + 45°C  
Storage : 0°C to + 60°C

### Accessories

Start/Reset remote control  
Intelligent remote control  
Bar code reader  
Printer  
Infrared switch  
Parameter storage module  
ATEQ software  
Modem  
Needle valve  
Calibrated leak  
Filtration kit  
Vacuum pump  
Sealing connectors  
*Please refer to ATEQ accessories list*



35980 Industrial Rd.  
Livonia, MI 48150  
734-848-3100 - leaktetsales@atequsa.com  
www.atequsa.com