
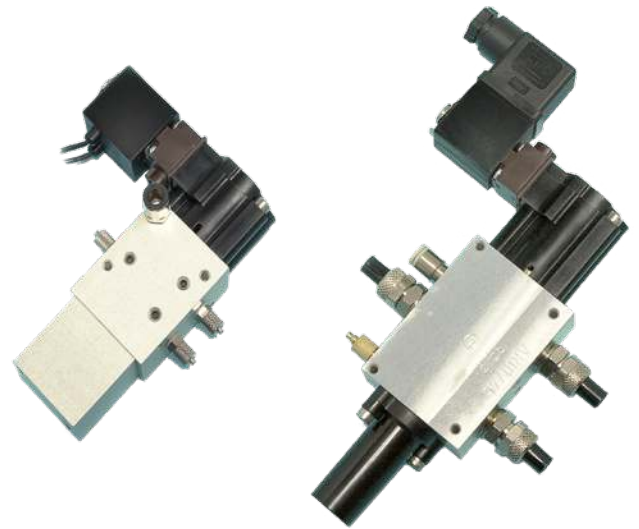


# We test, You produce.

## Y-Valve

The ATEQ Y valve is a 2 position, 3 way pressurized leak-tight directional valve that can be pneumatically or electrically piloted.

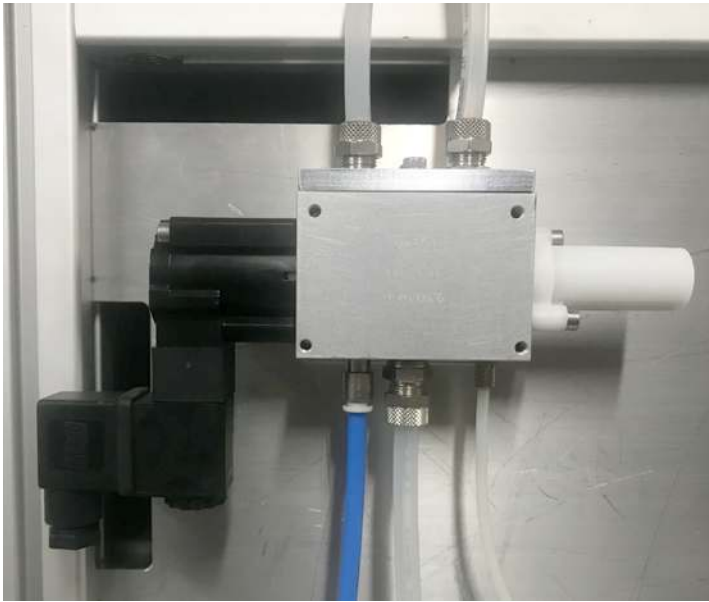

## Technical Specifications

*These products are intended for use in general purpose compressed air systems only*

<b>Operating Pressure Range</b>	<b>PSIG</b>	<b>Bar</b>	<b>Kpa</b>
Minimum	<b>Vac.</b>	<b>Vac.</b>	<b>Vac.</b>
Maximum	<b>217</b>	<b>15</b>	<b>1500</b>

<b>Pilot Pressure Range</b>	<b>PSIG</b>	<b>Bar</b>	<b>Kpa</b>
Minimum	<b>145</b>	<b>10</b>	<b>1000</b>
Maximum	<b>58</b>	<b>4</b>	<b>400</b>


**Operating Temperature Range** 32°F (0°C) to 131°F (55°C)

**Pressure Connections** 1/4" BSP Female Threads

**Solenoid** Voltage: 24V DC - 4W

**Dimensions** 4.3"x1"x7.5" (110x27x190mm)

**Weight** 1.4lb (640g)

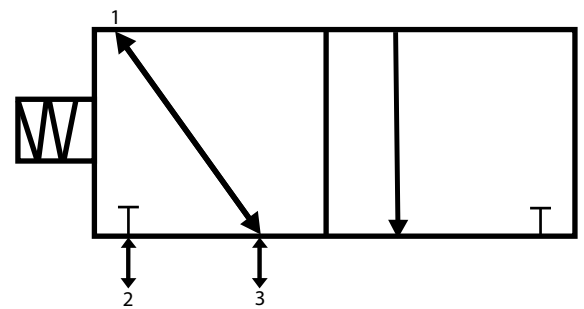

# ATEQ